


Flussonic Dome V3 6MP Human & Vehicle Detection IR Bullet IP Camera

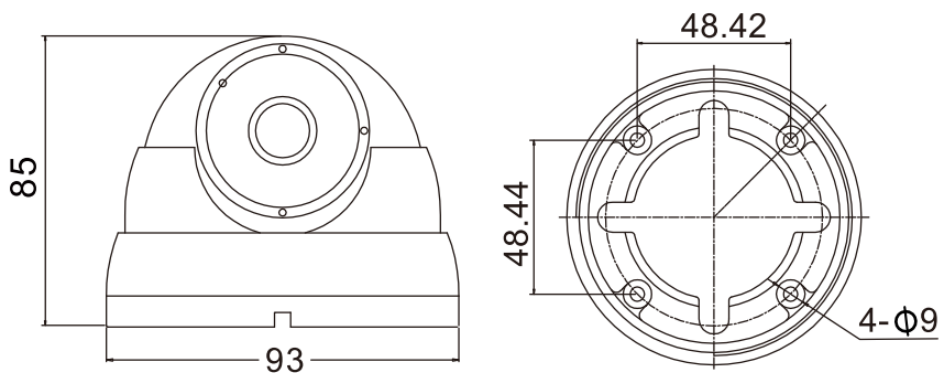

Features:

- ❖ 1/2.8" Sony CMOS sensor
- ❖ 6MP HD resolution 3072 x 2048 output
- ❖ Ultra low illumination 0.01Lux
- ❖ vDay/Night (ICR), AWB, 2D/3D-DNR, IR-CUT, Privacy Mask, Mirror
- ❖ vD-WDR, Motion Detection, Human Detection, Vehicle Detection
- ❖ vRTSP and Onvif 17.06 compatible
- ❖ vH.265/H.264 dual-stream media server
- ❖ vEasy-to-use P2P Cloud service
- ❖ vMulti web browser, PC Client, mobile APP remote access
- ❖ RJ45 100Mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 18 pcs SMD IR Leds, IR distance: 20-30M
- ❖ HD 3.6mm Fixed Lens
- ❖ With human body detection and Vehicle Detection
- ❖ Internal Microphone

Technical Specifications:

Model	W716AHBB94CA
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	3072(H)×2048 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR

White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	64Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Smart Event	Human Detection Vehicle Detection Motion Detection
IR Led	
IR Led	18 pcs SMD IR Leds
IR Distance	20-30M
Lens	
Focal length	3.6mm Fixed lens
Function	
PoE, Internal Microphone	
Network Services	
Protocol	HTTP(S)/RTSP/RTMP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox 32bit ESR, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC $\pm$ 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH